
PHEG2.P SN7629 (767 681)



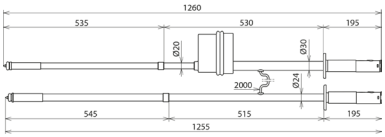

Dimension drawing

Type	PHEG2.P SN7629
Part No.	**767 681**
Response voltage (U_T)	120 V
Nominal voltage (U_N)	1 ... 24 kV
Type of voltage	d.c.
Length (indicator with test prod) (l_S)	765 mm
Length (insulating stick) (l_1)	495 mm
Length (connecting cable)	2000 mm
Total length (l_G)	1260 mm
Insertion depth (I_O)	545 mm
Standard	Based on DIN VDE 0682-411 (EN/IEC 61243-1)
Temperature range	– 25 °C ... + 55 °C, climatic category N
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations
Type	Two-pole
Indication	Visual
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced polyester tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**
Material (connecting cable)	**Highly flexible copper cable**

Masterdata	
Net weight	2.6 kg/pc(s)
GTIN	4013364153165
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component