
PHE3S 20 S ZK (767 724)

- Transport case included



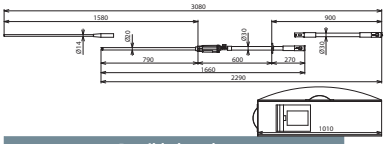

Possible lengths:		
Length l_G	Insertion depth l_0	Pos. No.
3080 mm	1580 mm	**4+5+11+25+27**
2290 mm	800 mm	**3+5+11+25+27**
1660 mm	800 mm	**3+5+11+25**

Dimension drawing

Type	**PHE3S 20 S ZK**
Part No.	**767 724**
Nominal voltage (U_N)	20 kV
Type of voltage	a.c.
Frequency	50 Hz
Category	S
Total length ($l_{G\,max}$)	3080 mm
Insertion depth ($I_{O\,max}$)	1580 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Standard (indicator with test prod)	EN/IEC 61243-1 (DIN VDE 0682-411)
Standard (universal gear coupling)	EN/IEC 60832 (DIN VDE 0682-211)
Temperature range	–25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations and overhead lines
Type	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced epoxy resin tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**

Masterdata	
Net weight	4.22 kg/pc(s)
GTIN	4013364125902
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.