
Datasheet: PHE III Voltage Detector

PHE3 U 3 30 S (767 733)

- Easy transport due to detachable insulating stick (M12) and test prod
- Insulating stick with plug-in coupling for extending the handle



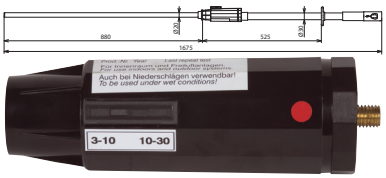

Dimension drawing

Type	PHE3 U 3 30 S
Part No.	**767 733**
Nominal voltage (U_N)	3 ... 10 / 10 ... 30 kV
Type of voltage	a.c.
Category	S 64
Total length (l_C)	1675 mm
Insertion depth (I_O)	880 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Indoor and outdoor switchgear installations
Application	Switchgear installations and overhead lines
Type	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced epoxy resin tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**

Masterdata	
Net weight	1.29 kg/pc(s)
GTIN	4013364070882
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component