
ZK85 BS (771 232)

- With insulated handle
- Allows to lock the clamping range of the screw clamps in several positions



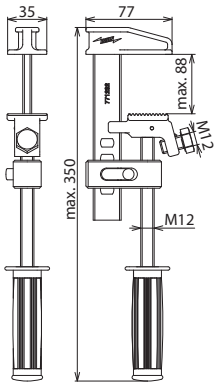

Dimension drawing

Screw clamps with M12 terminal screw and an insulated red handle for bare busbars.

Type	**ZK85 BS**
Part No.	**771 232**
Clamping range	85 mm
Anti-rotation protection	PK2
For cable cross section Cu	25 … 35 mm²
Max. short-circuit current I_k 0.5 s	10.0 kA
Max. short-circuit current I_k 1 s	6.9 kA
Material (clamp body)	MCI/gal Zn
Pressure plate material	Copper alloy
Screw	M12 x 20 mm
Screw material	StSt

Masterdata	
Net weight	1.05 kg/pc(s)
GTIN	4013364144415
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component