
# KKH 25 SK (772 320)

- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator



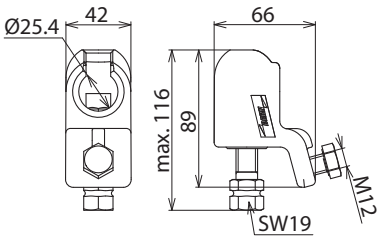


Dimension drawing

| Type | KKH 25 SK |
|---|---|
| **Part No.** | **772 320** |
| For fixed ball point Ø | 25 mm |
| Terminal lug material | **Cualloy / gal Sn** |
| Material (shaft) | **Copper alloy/gal Sn** |
| Pressure plate material | **Copper alloy/gal Sn** |
| Anti-rotation protection | PK1 |
| For cable cross section Cu | 16 … 150 mm² |
| Max. short-circuit current $I_k$ 0.5 s | 42.0 kA |
| Max. short-circuit current $I_k$ 1 s | 29.6 kA |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range | –25 °C … +55 °C |
| Material (clamp body) | **Copper alloy/gal Sn** |

| Masterdata | |
|---|---|
| Net weight | 785 g/pc(s) |
| GTIN | 4013364057432 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

**The clamps must have the same maximum short-circuit current as the earthing and short-circuiting cables!**