
KKH 25 SQL (772 324)

- Earthing and short-circuiting devices can be configured online by means of the earthing and short-circuiting configurator



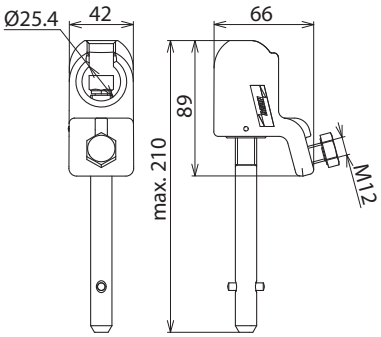

Dimension drawing

Type	KKH 25 SQL
Part No.	**772 324**
For fixed ball point Ø	25 mm
Anti-rotation protection	PK1
For cable cross section Cu	16 … 150 mm²
Max. short-circuit current I_k 0.5 s	42.0 kA
Max. short-circuit current I_k 1 s	29.6 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	–25 °C … +55 °C
Pressure plate material	**Copper alloy/gal Sn**
Material (clamp body)	**Copper alloy/gal Sn**
Material (shaft)	**Copper alloy/gal Sn**
Material (coupling aid)	**St/gal Zn**

Masterdata	
Net weight	719 g/pc(s)
GTIN	4013364080188
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must be designed for the same maximum short-circuit current as the earthing and short-circuiting cables!