
PSK 10 32 SQL SB (784 038)

- Earthing and short-circuiting devices can be configured online via the EaS configurator
- For connecting the phase cables of Earthing and short-circuiting devices to the overhead line
- With long threaded T pin shaft and safety bow



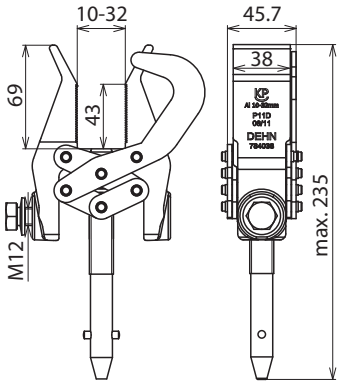

Dimension drawing

Type	PSK 10 32 SQL SB
Part No.	**784 038**
Clamping range Ø	10 ... 32 mm
Anti-rotation protection	PK2
For cable cross section Cu	16 ... 95 mm²
Max. short-circuit current I_k 0.5 s	18.7 kA
Max. short-circuit current I_k 1 s	18.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	–25 °C ... +55 °C
Pressure plate material	Aluminium alloy
Material (clamp body)	Aluminium alloy
Material (shaft)	StSt
Material (coupling aid)	StSt

Masterdata	
Net weight	1.01 kg/pc(s)
GTIN	4013364138452
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must be designed for the same maximum short-circuit current as the earthing and short-circuiting cables!