
PSK 10 65 SQL (784 301)

- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator
- For connecting the phase cables of single-pole and three-pole earthing and short-circuiting devices to the overhead line
- PK1 anti-rotation protection and long threaded T pin shaft



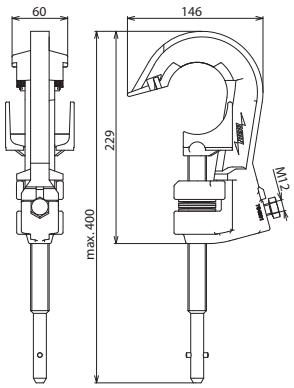

Dimension drawing

Type	PSK 10 65 SQL
Part No.	**784 301**
Clamping range Ø	10 … 65 mm
Anti-rotation protection	PK1
For cable cross section Cu	16 … 120 mm²
Max. short-circuit current I_k 0.5 s	33.5 kA
Max. short-circuit current I_k 1 s	23.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	–25 °C … +55 °C
Pressure plate material	**Aluminium alloy**
Material (clamp body)	**Aluminium alloy**
Material (shaft)	**Copper alloy/gal Sn**
Material (coupling aid)	**St/gal Zn**

Masterdata	
Net weight	1.7 kg/pc(s)
GTIN	4013364006553
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must be designed for the same maximum short-circuit current as the earthing and short-circuiting cables!

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component