

TRS MS (785 100)

- Transparent intake tubes ensure enhanced safety
- Plug-in coupling system allows fast replacement of operating heads
- Delivered in a suitable transport case

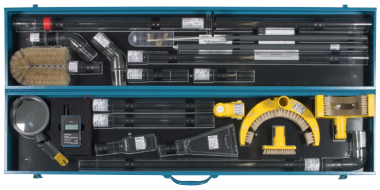

TRS MS Kit includes:			
Pos.	Part No.	Pos.	Part No.
1	785 301	19	785 140
5	785 131	20	785 150
6	785 132	21	785 170
7	785 130	25	785 220
10	785 120	26	785 221
15	2x 785 121	39	785 200
16	2x 785 122	42	785 180
17	2x 785 123	44	785 190
18	785 160	47	785 210

For more detailed information on these products, see www.dehn-international.com.

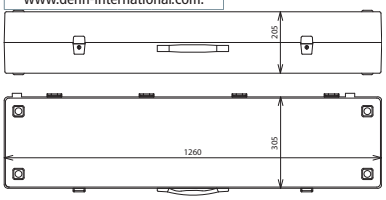

Dimension drawing

Type	TRS MS
Part No.	**785 100**
Nominal voltage (U_N)	Up to 36 kV
Frequency range	15 ... 60 Hz
Dimensions	1260 x 305 x 205 mm
Total length ($l_{G\,max}$ / $I_{G\,min}$)	3580 / 1180 mm
Extension ($l_{G\,max}$ / $I_{G\,min}$)	2515 / 115 mm
Standard	DIN VDE 0682-621
For use at	✷

Masterdata	
Net weight	18 kg/pc(s)
GTIN	4013364087606
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	82055980

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component