Datasheet: TRS MS Dry Cleaning Kit


TRS MS V1 (785 112)

- Transparent intake tubes ensure enhanced safety
- Plug-in coupling system allows fast replacement of operating heads
- Delivered in a suitable transport case



TRS MS V1 Kit includes:			
Pos.	Part No.	Pos.	Part No.
1	785 301	21	785 170
5	785 131	22	785 171
6	785 132	23	785 172
7	785 130	25	785 220
10	785 120	26	785 221
15	2x 785 121	39	785 200
16	2x 785 122	40	785 212
17	785 123	42	785 180
18	785 160	44	785 190
19	785 140	47	785 210

For more detailed information on these products, see www.dehn-international.com.

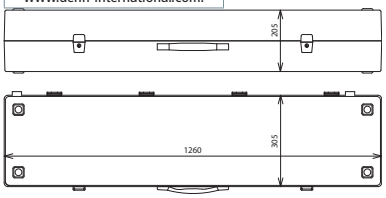

Dimension drawing

Type	TRS MS V1
Part No.	**785 112**
Nominal voltage (U_N)	Up to 36 kV
Frequency range	15 ... 60 Hz
Dimensions	1260 x 305 x 205 mm
Total length ($l_{G\,max}$ / $I_{G\,min}$)	3580 / 1180 mm
Extension ($l_{G\,max}$ / $l_{G\,min}$)	2515 / 115 mm
Standard	DIN VDE 0682-621
For use at	✷

Masterdata	
Net weight	17.8 kg/pc(s)
GTIN	4013364106550
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	82055980

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.