
# APC 48 50 (785 755)



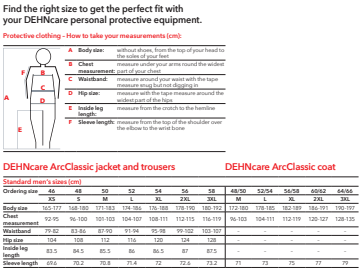


Dimension drawing

- Reinforced stand-up collar
- Zip and hook-and-loop fasteners

| **Type** | **APC 48 50** |
|---|---|
| **Part No.** | **785 755** |
| Arc fault protection class (box test 7 kA / 0.5 s – single-pole) | APC 2 |
| Arc energy ($W_{arc}$ oder $W_{LBP}$) | 320 kJ |
| Extended electric arc energy ($W_{arc}$ or $W_{LBP}$) (based on box test) | 630 kJ |
| EuroTest PIP001 (10 kA / 1 s – three-pole) | Yes |
| Arc Rating – ATPV (Open Arc Test) | 33.1 cal / cm² |
| PPE category (NFPA 70E) | PPE 3 |
| Size (international) | 48 / 50 (M) |
| Outer material | **Siliconised calf grain leather, 100% Kevlar interlock knit** |
| Inner material | **100% cotton** |
| Material (sewing thread) | **100% Kevlar** |
| Standard | IEC 61482-2, EN ISO 14116 |

| **Masterdata** | |
|---|---|
| Net weight | 2.62 kg/pc(s) |
| GTIN | 4013364152861 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 42031000 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

In case of very heavy soiling, there is the option of special leather dry cleaning. Further information can be found at www.dehn.online-impraegnierung.de.