
APC 52 54 (785 756)



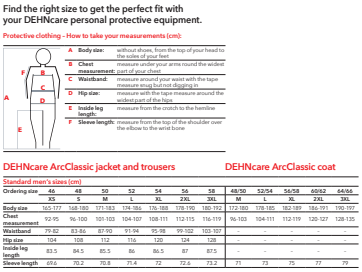

Dimension drawing

- Reinforced stand-up collar
- Zip and hook-and-loop fasteners

Type	**APC 52 54**
Part No.	**785 756**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2
Arc energy (W_{arc} oder W_{LBP})	320 kJ
Extended electric arc energy (W_{arc} or W_{LBP}) (based on box test)	630 kJ
EuroTest PIP001 (10 kA / 1 s – three-pole)	Yes
Arc Rating – ATPV (Open Arc Test)	33.1 cal / cm²
PPE category (NFPA 70E)	PPE 3
Size (international)	52 / 54 (L)
Outer material	**Siliconised calf grain leather, 100% Kevlar interlock knit**
Inner material	**100% cotton**
Material (sewing thread)	**100% Kevlar**
Standard	IEC 61482-2, EN ISO 14116

Masterdata	
Net weight	2.73 kg/pc(s)
GTIN	4013364152878
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	42031000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

In case of very heavy soiling, there is the option of special leather dry cleaning. Further information can be found at www.dehn.online-impraegnierung.de.