
Datasheet: Protective gloves APG

APG 12 (785 800)

- Excellent fit due to special glove cut
- Good touch sensitivity due to soft leather glove palm
- Breathable materials maximise wearing comfort



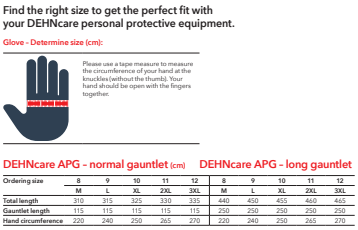

Dimension drawing

Type	**APG 12**
Part No.	**785 800**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2
Arc energy (W_{arc} oder W_{LBP})	320 kJ
Arc Rating – ATPV (Open Arc Test)	32.8 cal / cm²
PPE category (NFPA 70E)	PPE 3
Total length	335 mm
Gauntlet length	115 mm
Size (international)	12 (3XL)
Material (glove palm)	**Siliconised calf grain leather**
Material (glove back)	**100% Kevlar® interlock knit**
Material (sewing thread)	**Kevlar®**
Standard	IEC 61482-1-2; IEC 61482-1-1; EN 388, EN 407

Masterdata	
Net weight	260 g/paa
GTIN	4013364131019
PU	1 PAA
Customs tariff number (Comb. Nomenclature EU)	42032910

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component