
# APG XT 7 L (785 840)

- Excellent fit due to special glove cut
- Good touch sensitivity due to soft leather inner surface of the gloves
- Comfortable to wear due to the use of breathable materials



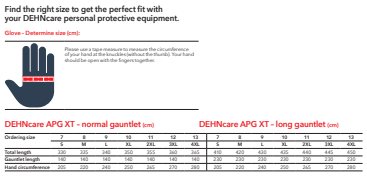


Dimension drawing

| Type | APG XT 7 L |
|---|---|
| **Part No.** | **785 840** |
| Standard | GS-ET 42-2, ASTM F2675, EN 388, EN 407 |
| Arc energy (APC 1 150) ($W_{arc}$ oder $W_{LBP}$) | 320 kJ |
| Material (glove palm) | **Siliconised calf grain leather** |
| Arc fault protection class (box test 7 kA / 0.5 s – single-pole) | APC 2 150 |
| Arc energy (APC 2 150) ($W_{arc}$ oder $W_{LBP}$) | 320 kJ |
| Arc Rating – ATPV (Open Arc Test) | 40 cal / cm² |
| PPE category (NFPA 70E) | PPE 4 |
| Total length | 410 mm |
| Gauntlet length | 230 mm |
| Size (international) | 7 (S) |
| Material (glove back) | **100% Kevlar interlock knit** |
| Material (sewing thread) | **Kevlar** |

| Masterdata | |
|---|---|
| Net weight | 285.92 g/paa |
| GTIN | 4013364486232 |
| PU | 1 PAA |
| Customs tariff number (Comb. Nomenclature EU) | 42032910 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component