
Datasheet: Protective gloves APG XT

APG XT 9 L (785 842)

- Excellent fit due to special glove cut
- Good touch sensitivity due to soft leather inner surface of the gloves
- Comfortable to wear due to the use of breathable materials



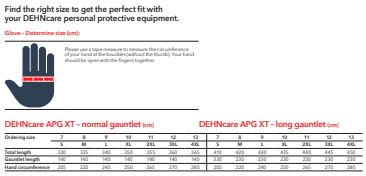

Dimension drawing

Type	APG XT 9 L
Part No.	**785 842**
Standard	GS-ET 42-2, ASTM F2675, EN 388, EN 407
Arc energy (APC 1 150) (W_{arc} oder W_{LBP})	320 kJ
Material (glove palm)	**Siliconised calf grain leather**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2 150
Arc energy (APC 2 150) (W_{arc} oder W_{LBP})	320 kJ
Arc Rating – ATPV (Open Arc Test)	40 cal / cm^2
PPE category (NFPA 70E)	PPE 4
Total length	430 mm
Gauntlet length	230 mm
Size (international)	9 (L)
Material (glove back)	**100% Kevlar interlock knit**
Material (sewing thread)	**Kevlar**

Masterdata	
Net weight	326.36 g/paa
GTIN	4013364486256
PU	1 PAA
Customs tariff number (Comb. Nomenclature EU)	42032910

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component