
# FRS ZK MS (785 940)

- Damp cleaning equipment for use under live conditions with special cleaning liquid
- Universal gear coupling for replacing and adjusting the angle of operating heads
- Delivered in a suitable transport case



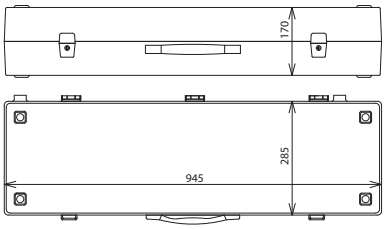


Dimension drawing

| Type | FRS ZK MS |
|---|---|
| **Part No.** | **785 940** |
| Nominal voltage ($U_N$) | Up to 36 kV |
| Frequency range | 15 ... 60 Hz |
| Dimensions | 945 x 285 x 170 mm |
| Total length ($l_{G\,max}$ / $I_{G\,min}$) | 3250 / 1450 mm |
| Extension ($l_{G\,max}$ / $I_{G\,min}$) | 2100 / 350 mm |
| Standard | Based on DIN VDE 0681-1 and DIN VDE 0682-621 |
| Standard (universal gear coupling) | EN/IEC 60832 (DIN VDE 0682-211) |
| For use at | ✷ |

| Masterdata | |
|---|---|
| Net weight | 10.85 kg/pc(s) |
| GTIN | 4013364106253 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 82055980 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component