
APJ OD OG F 46 (787 836)



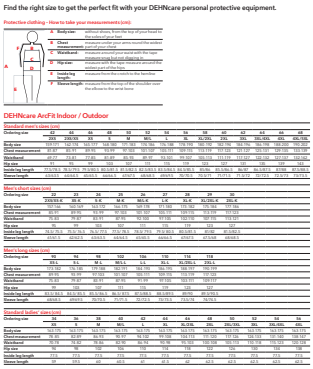

Dimension drawing

Type	APJ OD OG F 46
Part No.	**787 836**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2
Standard	IEC 61482-2, EN ISO 11612, EN 1149-5, EN ISO 20471, EN 13034, EN ISO 13688, EN ISO 11611
Arc energy (W_{arc} oder W_{LBP})	320 kJ
Material	**Modacrylic (40%), viscose (59%), static inhibitors (1%), PU membrane: meta-armid knitting (100%)**
Arc rating – ATPV (open arc)	16 cal / cm² *)
Arc rating – ELIM (open arc)	13 cal / cm²
PPE category (NFPA 70E)	PPE 2
Weight per unit area	330 g/m²
Material (sewing thread)	**Kevlar (100%)**
Primary colour	fluorescent orange
Secondary colour	grey
Zipper	red
Size (international)	46 (XL/2XL)

Masterdata	
Net weight	880 g/pc(s)
GTIN	4013364491762
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	62033911

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Outer fabric after preparation

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component