
Earth Connecting Elements for Switchgear Installations and Overhead Lines

EFK FL40 SKN (792190)

- Earthing and short-circuting devices can be configured online via the earthing and short-circuiting configurator



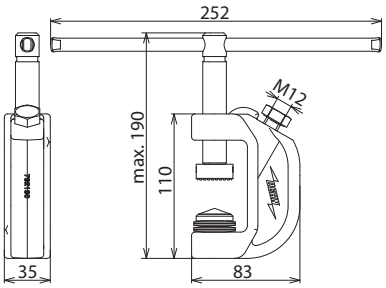

Dimension drawing

Type	EFK FL40 SKN
Part No.	**792190**
Clamping range	up to 40 mm
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	–25 °C ... +55 °C
Material (clamp body)	**MCI/gal Zn**
Material (shaft)	**Brass/gal Zn**
Pressure plate material	**Cu alloy/gal Sn / St/gal Zn**
Anti-rotation protection	PK1
For cable cross section Cu	16 ... 95 mm²
Material (wing nut)	**Cu alloy/gal Sn**
Max. short-circuit current I_k 0.5 s	26.5 kA
Max. short-circuit current I_k 1 s	18.7 kA
Terminal lug material	**E-Cu/gal Sn**
Material (milling plate)	**Hardened/nikel-plated steel**
Material (spring)	**Spring steel**

Masterdata	
Net weight	1.22 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364068315
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must have the same maximum short-circuit current as the earthing and short-circuiting cables!