
KLFP M16 KSS (795 020)



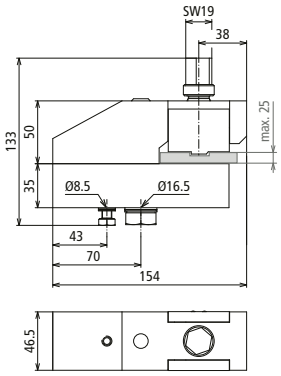

Dimension drawing

Fixed clamping point with fixing elements for a busbar thickness up to 25 mm for short-circuiting bars with longitudinal slot.

*) Note: max values see product data sheet for short-circuiting bar

NEW

Type	**KLFP M16 KSS**
Part No.	**795 020**
Type	with hexagon shaft wrench size 19
Material	**Al / St**
Max. short-circuit current I_k 0.5 s	130 kA *)
Max. short-circuit current I_k 1 s	90 kA *)
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Temperature range (T_U)	–25 °C ... +55 °C

Masterdata	
Net weight	2.87 kg/pc(s)
GTIN	4013364424296
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component