
HVI Conductor / HVI long Conductor

HVI LO 75 23 L400M GR M (819110)



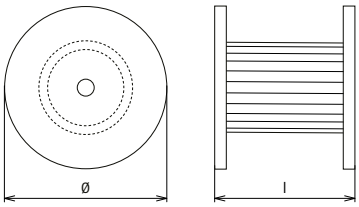

Dimension drawing

The HVI long Conductor for on-site assembly is delivered in a length of 400 m on a disposable plywood reel (diameter approx. 1000 mm, width approx. 690 mmtotal weight approx. 300 kg), incl. an Allen key.

Type	**HVI LO 75 23 L400M GR M**
Part No.	**819110**
Material of conductor	**Cu**
Material of insulation	**PE**
Sheath material	**PE**
Colour of conductor	grey
RAL colour	similar to 7035
Cross section of core (stranded)	19 mm²
Lightning current carrying capability (class / I_{imp})	H1 / 150 kA
Equivalent separation distance s (air)	≤ 75 cm
Diameter Ø conductor	23 mm
Characteristics of sheath	UV-stabilised and weather-resistant
Touch protection	Yes (as per DS2094)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	630 g/m
Customs tariff number (Comb. Nomenclature EU)	85446010
GTIN	4013364436008
PU	400 m

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.