
# HVI Conductor / HVI long Conductor

## HVI LO 75 23 L100M GR M (819136)



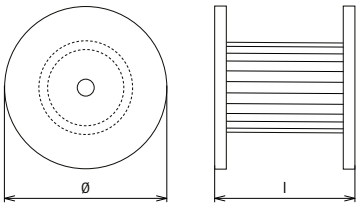


Dimension drawing

The HVI long Conductor for on-site assembly is delivered in a length of 100 m on a disposable plywood reel (diameter approx. 800 mm, width approx. 485 mm), incl. an Allen key.

| **Type** | **HVI LO 75 23 L100M GR M** |
|---|---|
| **Part No.** | **819136** |
| Material of conductor | **Cu** |
| Material of insulation | **PE** |
| Sheath material | **PE** |
| Colour of conductor | grey |
| RAL colour | similar to 7035 |
| Cross section of core (stranded) | 19 mm² |
| Lightning current carrying capability (class / $I_{imp}$) | H1 / 150 kA |
| Equivalent separation distance s (air) | ≤ 75 cm |
| Diameter Ø conductor | 23 mm |
| Characteristics of sheath | UV-stabilised and weather-resistant |
| Touch protection | Yes (as per DS2094) |
| Standard | DIN EN IEC 62561-8 (VDE 0185-561-8) |

| **Masterdata** | |
|---|---|
| Net weight | 630 g/m |
| Customs tariff number (Comb. Nomenclature EU) | 85446010 |
| GTIN | 4013364147140 |
| PU | 100 m |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.