
HVI Conductor / HVI long Conductor

HVI LO 75 20 L500M SW M (819138)



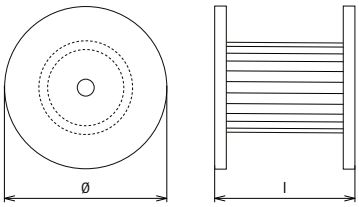

Dimension drawing

The HVI long Conductor for on-site assembly is delivered in a length of 500 m on a disposable plywood reel (diameter approx. 990 mm, width approx. 700 mm, total weight approx. 330 kg) incl. an Allen key.

Type	**HVI LO 75 20 L500M SW M**
Part No.	**819138**
Material of conductor	**Cu**
Material of insulation	**PE**
Sheath material	**PE**
Colour of conductor	black ●
RAL colour	similar to 9011
Cross section of core (stranded)	19 mm²
Lightning current carrying capability (class / I_{imp})	H1 / 150 kA
Equivalent separation distance s (air)	≤ 75 cm
Diameter Ø conductor	20 mm
Characteristics of sheath	UV-stabilised and weather-resistant
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	488 g/m
Customs tariff number (Comb. Nomenclature EU)	85446010
GTIN	4013364434523
PU	500 m

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.