
HVI Conductor / HVI long Conductor

HVI LO 75 23 L100M GR E (819156)



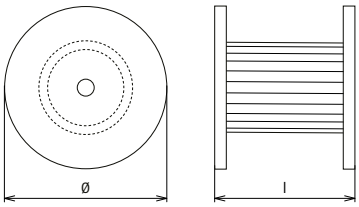

Dimension drawing

The HVI long Conductor for on-site assembly is delivered in a length of 100 m on a disposable plywood reel (diameter approx. 800 mm, width approx. 485 mm), incl. an Allen key.

Type	**HVI LO 75 23 L100M GR E**
Part No.	**819156**
Material of conductor	**Cu**
Material of insulation	**PE**
Sheath material	**PE**
Colour of conductor	grey
RAL colour	similar to 7035
Cross-section of core (solid)	19 mm²
Lightning current carrying capability (class / I_{imp})	H1 / 150 kA
Equivalent separation distance s (air)	≤ 75 cm
Diameter Ø conductor	23 mm
Characteristics of sheath	UV-stabilised and weather-resistant
Touch protection	Yes (as per DS2094)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	640 g/m
Customs tariff number (Comb. Nomenclature EU)	85446010
GTIN	4013364531949
PU	100 m

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component