
Air-termination Masts for HVI light Conductors on Flat Roofs

FM D30 L2800 DBS R320 GFK AL STTZN (819287)



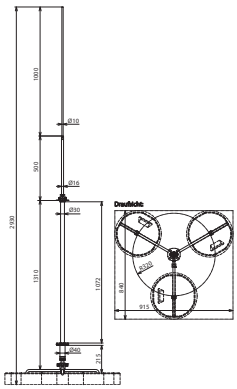

Dimension drawing

Type	FM D30 L2800 DBS R320 GFK AL STTZN
Part No.	**819287**
Height	2800 mm
Material of tripod	**St/tZn**
Space required for tripod	850 x 930 mm
Radius of tripod	320 mm
Number of bases	3
Material of supporting tube	**GRP** / **Al**
Length of supporting tube	1300 mm
Insulating clearance	1095 mm
Diameter Ø outside	30 mm
Length of air-termination rod	1500 mm
Material of air-termination tip	**Al**
Max. gust wind speed for 3 bases, 17 kg each, 2x HVI light outside	132 km/h
Pull-out force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	4.47 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364252097
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component