
HVI light plus Conductor

HVI LI PL 60 21 L500M GR (819605)



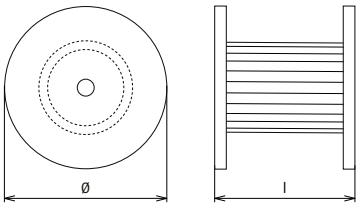

Dimension drawing

The HVI light plus Conductor for on-site assembly comes on a disposable plywood reel. Hexagon socket wrench included in delivery. Length: 500 m

Type	**HVI LI PL 60 21 L500M GR**
Part No.	**819605**
Material of conductor	**Cu**
Material of insulation	**PE**
Sheath material	**PE**
Colour of conductor	grey
RAL colour	similar to 7004
Cross-section of core (solid)	16 mm²
Lightning current carrying capability (class / I_{imp})	H1 / 150 kA
Equivalent separation distance s (air)	≤ 60 cm
Diameter Ø conductor	21 mm
Characteristics of sheath	UV-stabilised and weather resistant
Touch protection	Yes (as per DS2094)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	470 g/m
Customs tariff number (Comb. Nomenclature EU)	85446010
GTIN	4013364499652
PU	500 m

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.