
Air-termination mast for HVI light plus Conductor on flat roofs

FM D40 L3700 GFK AL DBS R560 STTZN (819687)



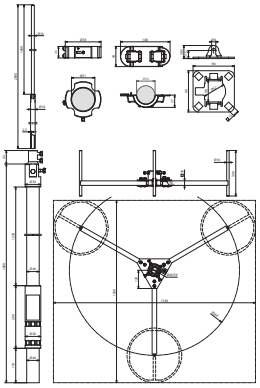

Dimension drawing

Type	FM D40 L3700 GFK AL DBS R560 STTZN
Part No.	**819687**
Height	3700 mm
Material of tripod	**HDG steel (St/tZn)**
Space required for tripod	1200 x 1330 mm
Radius of tripod	560 mm
Material of supporting tube	**GRP / Al**
Length of supporting tube	1600 mm
Insulating clearance	1230 mm
Diameter Ø outside	40 mm
Length of air-termination rod	2000 mm
Material of air-termination rod	**AlMgSi**
Pull-out force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	12.9 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364494435
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.