
Air-termination mast for HVI light plus Conductor on flat roofs

FM D40 L2700 GFK AL V2A DBS R320 STTZN (819690)



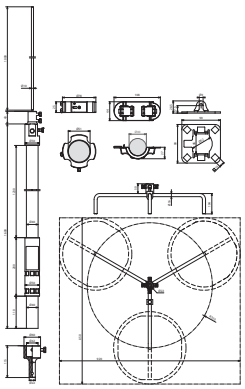

Dimension drawing

Type	FM D40 L2700 GFK AL V2A DBS R320 STTZN
Part No.	**819690**
Height	2700 mm
Material of tripod	**HDG steel (St/tZn)**
Space required for tripod	850 x 920 mm
Radius of tripod	320 mm
Number of bases	3
Material of supporting tube	**GRP / Al**
Length of supporting tube	1600 mm
Insulating clearance	1230 mm
Diameter Ø outside	40 mm
Length of air-termination rod	1000 mm
Material of air-termination tip	**StSt**
Pull-out force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	6.4 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364494466
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.