
Air-Termination Mast with HVI Conductor

FM 60 L11M IP HVI M L10M GFK AL STTZN (819730)

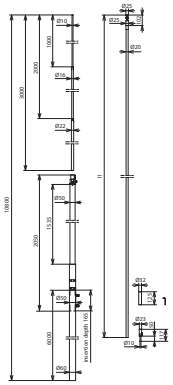

Dimension drawing

Please specify conductor length when ordering (0.5 m steps).

Type	**FM 60 L11M IP HVI M L10M GFK AL STTZN**
Part No.	**819730**
Total length of air-termination mast	10800 mm
Length of air-termination rod	3000 mm
Material of air-termination rod	**Al**
Length of supporting tube	2100 mm
Material of supporting tube	**GRP** / **Al**
Length of mast pipe	6000 mm
Material of mast pipe	**St/tZn**
Diameter Ø conductor	20 mm
Lightning current carrying capability (class / I_{imp})	H1 / 150 kA
Colour of conductor	black ●
Material of conductor	**Cu**
Minimum order length	10 m
Max. gust wind speed	(Max. free length 8,500 mm, 1x HVI inside) 156 km/h
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	53 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364243477
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.