
Air-termination Mast with HVI power Conductor

FM 60 L11M IP HVIP L10M GFK AL STTZN (819760)

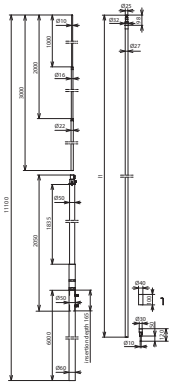

Dimension drawing

Please specify conductor length when ordering (0.5 m steps).

Type	**FM 60 L11M IP HVIP L10M GFK AL STTZN**
Part No.	**819760**
Total length of air-termination mast	11000 mm
Length of air-termination rod	3000 mm
Material of air-termination rod	**Al**
Length of supporting tube	2300 mm
Material of supporting tube	**GRP** / **Al**
Length of mast pipe	6000 mm
Material of mast pipe	**St/tZn**
Diameter Ø conductor	27 mm
Lightning current carrying capability (class / I_{imp})	H2 / 200 kA
Colour of conductor	black ●
Material of conductor	**Cu**
Minimum order length	10 m
Max. order length	35 m
Suitable for installation outside the tube	no
Max. gust wind speed	(Max. free length 8,500 mm, 1x HVI power inside) 138 km/h
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	56.64 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364240391
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component