
RD 10 V4A R20M (860 020)

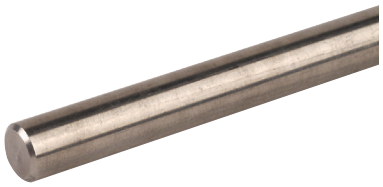

Stainless steel wire according to EN 62561-2, for lightning protection and earth-termination systems or equipotential bonding.

Stainless steel wires (Rd 10 mm) for use in soil have to be made of StSt (V4A) with a molybdenum content > 2 % e.g. 1.4571, 1.4404, in accordance with EN 62561-2 and IEC/EN 62305-3.

Type	RD 10 V4A R20M
Part No.	**860 020**
Diameter Ø conductor	10 mm
Cross section	78 mm²
Material	StSt (V4A)
Material No.	1.4571 / 1.4404
Standard	based on EN 62561-2
Specific conductance	≥ 1.25 m / Ohm mm²
Specific resistance	≤ 0.8 Ohm mm² / m
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	2.9 kA
Length tolerance	+/- 5%

Masterdata	
Net weight	1 kg/kg
GTIN	4013364092662
PU	1 KG
Customs tariff number (Comb. Nomenclature EU)	72210010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Conductor materials can only be supplied in the original coil weights.
Further conductor materials as specified in the standard series EN 62561-2 are available on request.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component