

DVA CSP 3P 100 FM (900 360)

- Prewired combined lightning current and surge arrester, energy-coordinated with power supply systems for cell sites (DEHNvap CSP ... Cell Site Protection)
- Maximum system availability due to follow current limiting RADAX Flow spark gap technology
- Easy replacement of protection modules without tools due to module release button



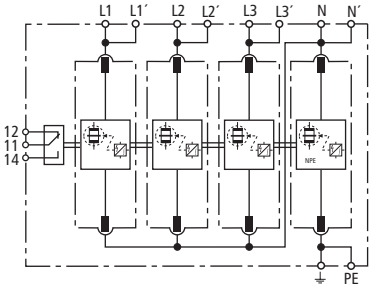

Basic circuit diagram

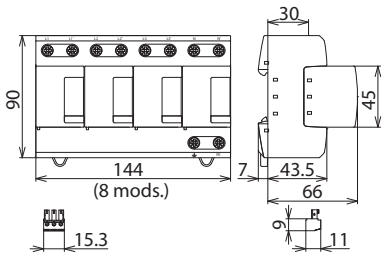

Dimension drawing

Modular combined lightning current and surge arrester for use in TT and TN-S systems (3+1 configuration) for protecting 230/400 V power supply systems of cell sites

Type	DVA CSP 3P 100 FM
Part No.	**900 360**
SPD according to EN 61643-11 / IEC 61643-11	type 1 + type 2 / class I + class II
Energy coordination with terminal equipment (≤ 10 m)	type 1 + type 2 + type 3
Nominal voltage (a.c.) (U_N)	230 / 240 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [L-N]/[N-PE] (U_C)	264 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [N-PE] ($U_{C\ (N-PE)}$)	255 V (50 / 60 Hz)
Lightning impulse current (10/350 µs) [L1+L2+L3+N-PE] (I_{total})	100 kA
Lightning impulse current (10/350 µs) [L-N]/[N-PE] (I_{imp})	25 / 100 kA
Nominal discharge current (8/20 µs) (I_n)	25 / 100 kA
Specific energy [L1+L2+L3+N-PE] (W/R)	2.50 MJ/ohms
Specific energy [L-N]/[N-PE] (W/R)	156.25 kJ/ohms / 2.50 MJ/ohms
Voltage protection level [L-N]/[N-PE] (U_p)	≤ 1.5 kV / ≤ 1.5 kV
Follow current extinguishing capability [L-N]/[N-PE] (I_{fi})	25 kA_{rms} / 100 A_{rms}
Follow current limitation / Selectivity	no tripping of a 20 A gG fuse up to 25 kA_{rms} (prosp.)
Response time (t_A)	≤ 100 ns
Max. backup fuse (L) up to I_K = 25 kA_{rms}	315 A gG
Max. backup fuse (L) up to I_K > 25 kA_{rms}	200 A gG
Max. backup fuse (L-L')	125 A gG
Temporary overvoltage (TOV) [L-N] (U_T) – Characteristic	440 V / 120 min. – withstand
Temporary overvoltage (TOV) [N-PE] (U_T) - Characteristic	1200 V / 200 ms – withstand
Additional abnormal voltage test: 485 V AC / 50 Hz for 24 h	withstand
Operating temperature range [parallel]/[series] (T_U)	-40°C...+80°C / -40°C...+60°C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (L1, L1', L2, L2', L3, L3', N, N', PE,) (min.)	10 mm² solid / flexible
Cross-sectional area (L1, L2, L3, N, PE) (max.)	50 mm² stranded / 35 mm² flexible
Cross-sectional area (L1', L2', L3', N',) (max.)	35 mm² stranded / 25 mm² flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	8 Standard DIN module, DIN 43880
Approvals	KEMA
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	250 V / 0.5 A
Switching capacity (d.c.)	250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm² solid / flexible

© DEHN (U.K.) LTD. • Unit 4 Velocity Point • Castleton Road • Armley • Leeds • LS12 2EE • United Kingdom • Tel. +44 113 541 8900 • info@dehn.co.uk • www.dehn.co.uk

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

Masterdata	
Net weight	1.3 kg/pc(s)
GTIN	4013364111332
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.