


DCOR L 2P 275 SO LT (900 435)

- Visual fault indication for both protective paths
- Interruption of the load circuit in the event of a fault
- Compact design

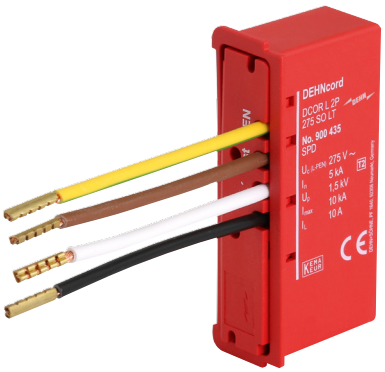



Basic circuit diagram

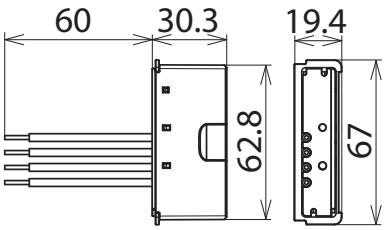

Dimension drawing

Two-pole surge arrester for TCN systems; compact design. With disconnection of the load circuit in the event of a fault and protection of the control phase.

Type	**DCOR L 2P 275 SO LT**
Part No.	**900 435**
Extended technical data	
Response time [L-PEN] (t_A)	≤ 25 ns
Temporary overvoltage (TOV) [L-PEN] (U_T) – Characteristic	335 V / 5 sec. – Festigkeit 440 V / 120 min. – sicherer Ausfall
Additional tests:	----------
Total discharge current (I_{sum})	20 kA
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	Typ 2 / Class II
Energy coordination with terminal equipment (≤ 10 m)	Typ 2 + Typ 3
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [L-PEN] (U_C)	275 V (50 / 60 Hz)
Nominal discharge current (8/20 µs) (I_n)	5 kA
Max. discharge current (8/20 µs) (I_{max})	10 kA
Voltage protection level [L-PEN] (U_P)	≤ 1.5 kV
Voltage protection level [L-PEN] at 3 kA (U_P)	≤ 1 kV
Voltage protection level [L-PEN] at 1.5 kA (U_P)	≤ 0.85 kV
Max. load current (I_L)	10 A
Max. mains-side overcurrent protection	B 16 A
Short-circuit withstand capability for mains-side overcurrent protection (I_{SCCR})	1 kA_{eff}
Short-circuit withstand capability for mains-side overcurrent protection with 16 A gG (I_{SCCR})	6 kA_{eff}
Fault indication	rot
Interruption of the load circuit in the event of a fault	ja
Number of ports	1
Operating temperature range (T_U)	-40 °C ... +80 °C
Connecting wires	1,5 mm^2, Länge 60 mm
Enclosure material	Thermoplast, Farbe rot, UL 94 V-2
Place of installation	Innenraum, Sicherungskästen / Kabelübergangskasten für Masteinbau
Degree of protection of installed device	IP 20
Approvals	KEMA
Extended technical data:	----------
Combination wave (U_{OC})	10 kV

Masterdata	
Net weight	54.1 g/pc(s)
GTIN	4013364292963
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.