

STAK 3X16 (900 588)

- Allows „“V-connection““ (connection of three conductors) of surge protective devices up to 16 mm²
- Allows EMC-optimised feed-through wiring according to IEC 60364-5-53

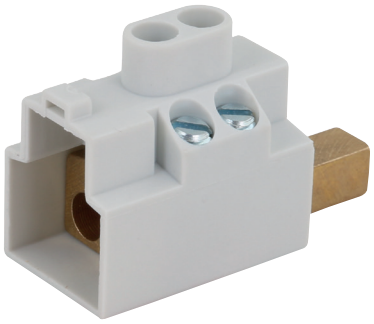

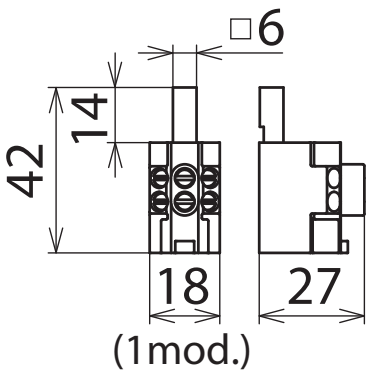

Dimension drawing

Pin-shaped terminal for EMC-optimised through-wiring of lightning current and surge arresters according to IEC 60364-5-53.

Type	**STAK 3X16**
Part No.	**900 588**
Nominal voltage (a.c. / d.c.) (U_N)	690 V / 1500 V
Nominal load current (a.c.) (I_L)	160 A
Load current at V-wiring	80 A
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Rated insulation voltage (U_i)	1000 V
Rated impulse withstand voltage (U_{imp})	8 kV
Operating temperature range (T_U)	-40 °C ... +80 °C
Cross-sectional area (min.)	1.5 mm² solid / flexible
Cross-sectional area (max.)	16 mm² stranded / 10 mm² flexible
Type of connection	front

Masterdata	
Net weight	31.42 g/pc(s)
GTIN	4013364323933
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component