

STAK 2X16 (900 589)

- Enables the V-connection (connection of 2 conductors) to surge protective devices with 10 mm² or 16 mm²
- Allows EMC-optimised feed-through wiring according to DIN VDE 0100-534.

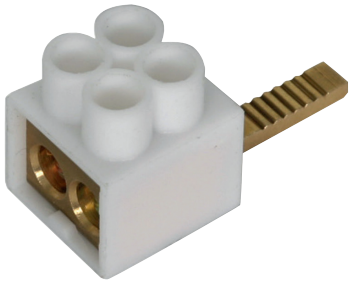

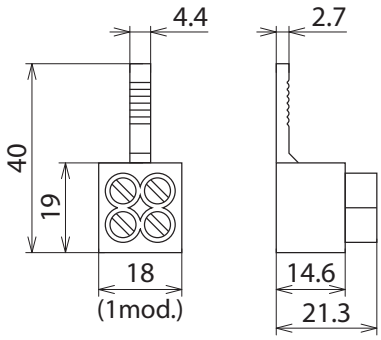

Dimension drawing

Pin-shaped terminal for EMC-optimised feed-through wiring of lightning current and surge arresters according to IEC 60364-5-53.

Type	**STAK 2X16**
Part No.	**900 589**
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Cross-sectional area (min.)	2x 10 mm²
Cross-sectional area (max.)	2x 16 mm²
Type of connection	front (double terminal)

Masterdata	
Net weight	20 g/pc(s)
GTIN	4013364109339
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.