

MVS 1 4 8 TT (900 849)

- Allows compact interconnection of the arresters
- Suitable for installation in a TT system for a shock-proof connection of the neutral potential of the arresters

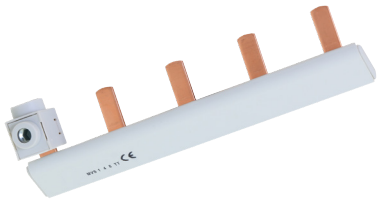

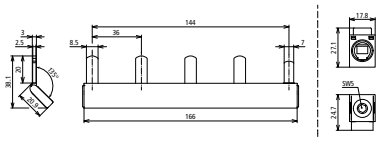

Dimension drawing

Modular wiring clip for TT systems, insulated, single-phase, four-pole with connection clamp up to 50 mm².

Type	MVS 1 4 8 TT
Part No.	**900 849**
Type	Single-phase
Number of contact studs	4
Dimensions	166 x 38.1 x 22 mm
Max. lightning current (10/350 µs) based on DIN EN 61643-11 (I_{imp})	100 kA
Material of the electrical conductor	E-Cu-ETP
Insulation material	PC
Cross-sectional area of the feed terminal	10–50 mm (solid or stranded) / 6–35 mm² (flexible with wire end ferrule)
Max. tightening torque of the clamping screw	7 nm
Insulated design	Yes
Screw width of clamping screw	Hexagon socket 5

Masterdata	
Net weight	118.22 g/pc(s)
GTIN	4013364473348
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369001

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component