
IGA 7 IP54 (902 314)

- Lightning-impulse-current-tested insulating enclosure



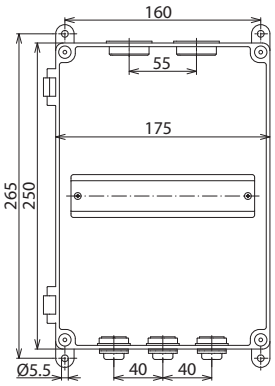

Dimension drawing

Lightning-current-tested insulating enclosure with a max. capacity of seven modules; with EPDM grommet flange for two cables (Ø1-25 mm) and three mounted M20 grommet openings with lock nut; ideally suited for series connection.

Type	**IGA 7 IP54**
Part No.	**902 314**
Degree of protection	IP 54
Type	lightning-current-tested
Cover	transparent
Enclosure colour	grey
Number of cable entries	2x for cables Ø1-25 mm; 3x for cables Ø8-13 mm
Capacity	7 modules, DIN 43880
Dimensions (B x H x D)	175 x 250 x 100 mm
Cover	sealable

Masterdata	
Net weight	786 g/pc(s)
GTIN	4013364151031
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85381000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.