
IGA 10 V2 IP54 (902 315)

- Lightning-impulse-current-tested insulating enclosure



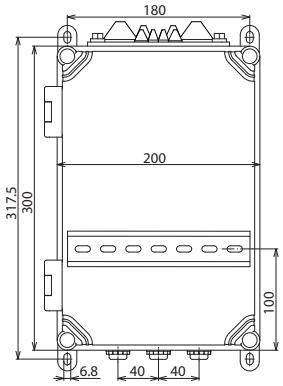

Dimension drawing

Lightning-current-tested insulating enclosure with a max. capacity of ten modules; with grommet flange for 11 EPDM cables (Ø5-30 mm) and three mounted M20 grommet openings with lock nut; ideally suited for series connection.

Type	**IGA 10 V2 IP54**
Part No.	**902 315**
Degree of protection	IP 54
Type	lightning-current-tested
Cover	transparent
Enclosure colour	grey
Number of cable entries	4x for cables Ø5-7mm; 3x for cables Ø7-10 mm; 2x for cables Ø10-14 mm or Ø15-30 mm each; 3x for cables Ø8-13 mm
Capacity	10 modules, DIN 43880
Dimensions (B x H x D)	200 x 300 x 132 mm
Cover	sealable

Masterdata	
Net weight	1.83 kg/pc(s)
GTIN	4013364125759
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85381000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component