
IGA 24 IP54 (902 472)

- Easy visual inspection of the installed arresters through transparent door
- With integrated three-pole PE and twelve-pole N plug-in terminals
- With cable entry cover



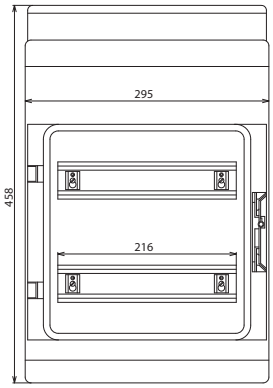

Dimension drawing

Insulating enclosure for arresters with a capacity of 2x 12 modules; with integrated, elastic seal membrane for cable entry; ideally suited for feed-through wiring.

Type	**IGA 24 IP54**
Part No.	**902 472**
Degree of protection	IP 54
Cover	transparent door
Enclosure colour	grey, RAL 7035
Number of cable entries	8x for cables Ø7-12 mm; 8x for cables Ø7-14 mm; 4x for cables Ø12-20 mm; 1x for cables Ø16.5-29 mm (top and bottom)
PE / N quantity x cross-section	6x 25 mm^2, 24x 4 mm^2, Cu
Capacity	24 modules (2x 12 modules), DIN 43880
Dimensions (B x H x D)	295 x 458 x 129 mm

Masterdata	
Net weight	2.39 kg/pc(s)
GTIN	4013364108950
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component