
IGA 6 IP54 (902 485)

- Lightning-impulse-current-tested insulating enclosure for arresters



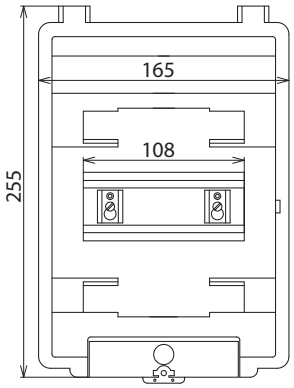

Dimension drawing

Lightning-current-tested insulating enclosure for arresters with a capacity of six modules; with knockouts for cable entry and plug-in glands; ideally suited for feed-through wiring.

Type	**IGA 6 IP54**
Part No.	**902 485**
Degree of protection	IP 54
Type	lightning-current-tested
Cover	transparent
Enclosure colour	grey
Number of knockouts	4x M20; 2x M25/32; 1x M 32/40 (top and bottom)
Number of cable entries	2 plug-in glands for cables Ø8-23 mm (M32 knockout)
Capacity	6 modules, DIN 43880
Dimensions (B x H x D)	165 x 255 x 115 mm
Cover	sealable

Masterdata	
Net weight	612 g/pc(s)
GTIN	4013364045767
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component