

TL2 10DA CC (907 991)

- Optional connection to LSA or spring-loaded terminals
- Routing of different wire diameters
- DRL adapted to DIN rail systems

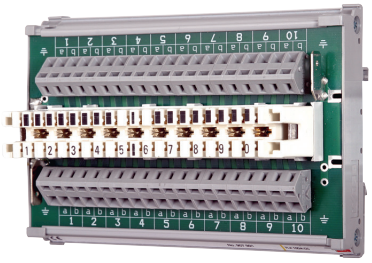

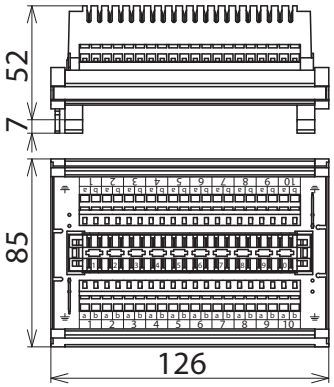

Dimension drawing

DIN rail mounted routing module with LSA disconnection block of the 2/10 series as well as spring-loaded terminals for variable wire connection. DPL and DEHNrapid LSA surge arresters can be plugged into the routing module.

Type	**TL2 10DA CC**
Part No.	**907 991**
Carrying capacity of connection components D1 Total lightning impulse current (10/350 µs) (I_{imp})	5 kA
Operating temperature range (T_U)	-40 °C ... +80 °C
Degree of protection	IP 20
For mounting on	35 mm DIN rails acc. to EN 60715
Connection (input / output)	spring or LSA / spring or LSA
Cross-sectional area of spring terminal, solid	0.08-2.5 mm²
Cross-sectional area of spring terminal, flexible	0.08-2.5 mm²
Earthing via	DIN rail / flat connector 6.3 mm
Enclosure material	PA / PBT
Diameter of solid conductors	0.40-0.80 mm
Conductor diameter with insulation	0.70-1.60 mm
Volume resistance of IPC terminal	< 10 mohms

Masterdata	
Net weight	181.2 g/pc(s)
GTIN	4013364112988
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.