
EL2 38EA LSA (907 993)

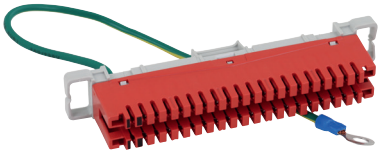

Series 2 for LSA technology for connecting up to 38 earth drain wires or unused signal cores. With earth wire and M4 ring cable lug.

Type	**EL2 38EA LSA**
Part No.	**907 993**
Earthing via	earthing conductor with M4 ring cable lug
Diameter of solid conductors	0.40 - 0.80 mm
Conductor diameter with insulation	0.70 - 1.50 mm
Contacting frequency for conductor diameters ≤ 0.65 mm	> 50 x
Contacting frequency for conductor diameters of 0.8 mm	≤ 50 x
Contact material	special brass
Contact surface	silver
Flame protection	UL 94 VO
Insulation resistance	5x 10,000 Mohms
Volume resistance of IPC terminal	< 10 mohms
Electric strength	2 kV / 50 Hz
Colour	red ●

Masterdata	
Net weight	59.8 g/pc(s)
GTIN	4013364048584
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component