
AL2 10DA LSA (907 997)

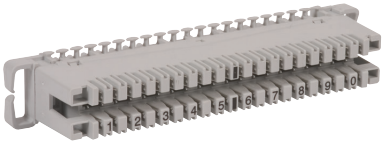

Series 2 for LSA technology for inseparably connecting 10 pairs each on the cable and routing side. Accomodates DPL 10 G3 arresters. Parallel protective circuit only.

Type	**AL2 10DA LSA**
Part No.	**907 997**
Enclosure material	PBT
Test standards	DIN 47608-1, -2
Diameter of solid conductors	0.40-0.80 mm
Conductor diameter with insulation	0.70-1.50 mm
Contacting frequency for conductor diameters ≤ 0.65 mm	> 50 x
Contacting frequency for conductor diameters of 0.8 mm	≤ 50 x
Contact material	special brass
Contact surface	silver
Flame protection	UL 94 V-0
Insulation resistance	5x 10,000 Mohms
Volume resistance of IPC terminal	< 10 mohms
Electric strength	2 kV / 50 Hz

Masterdata	
Net weight	48 g/pc(s)
GTIN	4013364033542
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.