

DG PLU 230 (908 012)

- High discharge capacity due to heavy-duty zinc oxide varistors (Imax 50 kA 8x20µs)
- ANSI/UL 1449 – 4th Ed. Open-Type 1 SPD
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device





Basic circuit diagram

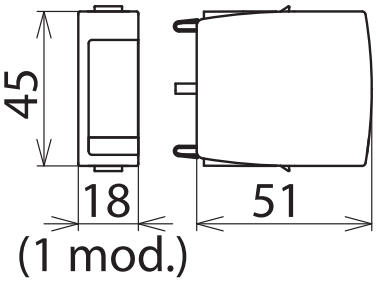

Dimension drawing

Varistor-based protection module for DEHNguard MU ... and DEHNguard SU ... surge arresters

Type	**DG PLU 230**
Part No.	**908 012**
Max. continuous operating voltage MCOV	230 Vac
Nominal discharge current (8/20µs) (I_n)	20 kA
Max. discharge current (I_{max})	50 kA

Masterdata	
Net weight	39.7 g/pc(s)
GTIN	4013364148505
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.