

# DG PLU 510 (908 013)

- High discharge capacity due to heavy-duty zinc oxide varistors (Imax 50 kA 8x20µs)
- ANSI/UL 1449 – 4th Ed. Open-Type 1 SPD
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device



Basic circuit diagram

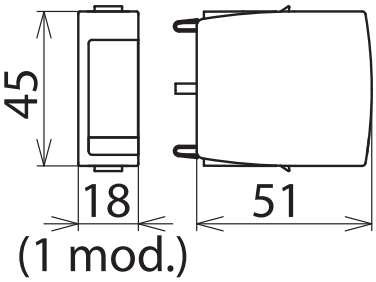


Dimension drawing

Varistor-based protection module for DEHNguard MU ... and DEHNguard SU ... surge arresters

| **Type** | **DG PLU 510** |
|---|---|
| **Part No.** | **908 013** |
| Max. continuous operating voltage MCOV | 510 Vac |
| Nominal discharge current (8/20µs) ( $I_n$) | 20 kA |
| Max. discharge current ($I_{max}$) | 50 kA |

| **Masterdata** | |
|---|---|
| Net weight | 56.9 g/pc(s) |
| GTIN | 4013364148536 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85363030 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.