

DG PLU 550 (908 015)

- High discharge capacity due to heavy-duty zinc oxide varistors (Imax 50 kA 8x20µs)
- ANSI/UL 1449 – 4th Ed. Open-Type 1 SPD
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device





Basic circuit diagram

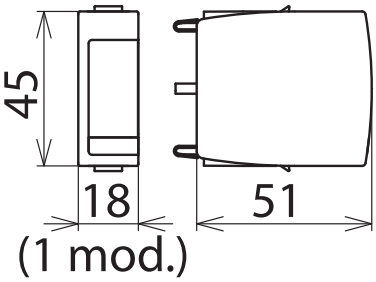

Dimension drawing

Varistor-based protection module for DEHNguard MU ... and DEHNguard SU ... surge arresters

Type	**DG PLU 550**
Part No.	**908 015**
Max. continuous operating voltage MCOV	550 Vac
Nominal discharge current (8/20µs) (I_n)	20 kA
Max. discharge current (I_{max})	50 kA

Masterdata	
Net weight	59.9 g/pc(s)
GTIN	4013364148543
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.