

DPRO 230 (909 230)

- Surge protection with monitoring device and disconnector
- Visual operating state (green) and fault indication (red)
- Enhanced safety due to fault-proof Y protective circuit



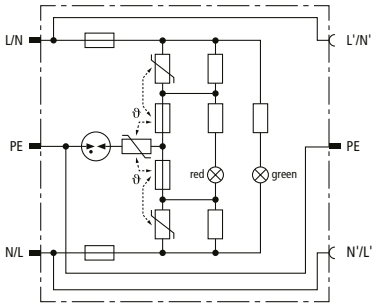

Basic circuit diagram

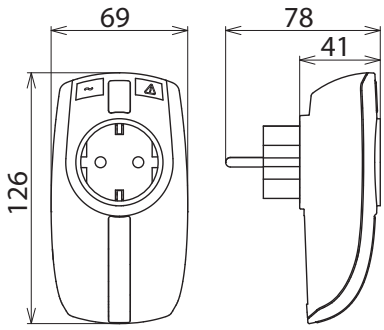

Dimension drawing

Surge protective adapter with integrated child lock.

Type	DPRO 230
Part No.	**909 230**
SPD according to EN 61643-11 / IEC 61643-11	type 3 / class III
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	255 V (50 / 60 Hz)
Nominal load current (a.c.) (I_L)	16 A
Nominal discharge current (8/20 µs) (I_n)	3 kA
Total discharge current (8/20 µs) [L+N-PE] (I_{total})	5 kA
Combination wave (U_{OC})	6 kV
Combination wave [L+N-PE] ($U_{OC\ total}$)	10 kV
Voltage protection level [L-N] / [L/N-PE] (U_p)	≤ 1350 / ≤ 1500 V
Response time [L-N] (t_A)	≤ 25 ns
Response time [L/N-PE] (t_A)	≤ 100 ns
Max. mains-side overcurrent protection	B 16 A
Short-circuit withstand capability for max. mains-side overcurrent protection (I_{SCCR})	1 kA_{rms}
Temporary overvoltage (TOV) [L-N] (U_T) – Characteristic	335 V / 5 sec. – Festigkeit 440 V / 120 min. – sicherer Ausfall
Temporary overvoltage (TOV) [L/N-PE] (U_T) – Characteristic	335 V / 120 min. – Festigkeit 440 V / 5 sec. – Festigkeit
Temporary overvoltage (TOV) [L+N-PE] (U_T) – Characteristic	1200 V + U_{REF} / 200 ms – safe failure
Fault indication	red light
Operating state indication	green light
Number of ports	1
Operating temperature range (T_U)	-25 °C ... +40 °C
Mounting	earthed socket outlets DIN 49440 / DIN 49441
Enclosure material	thermoplastic, pure white, UL 94 V-2
Place of installation	indoor installation
Degree of protection	IP 20
Dimensions	126 x 69 x 41 mm

Masterdata	
Net weight	198.5 g/pc(s)
GTIN	4013364117686
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component