

DSH ZP B2 SG TT 255 (909 396)

- Type 1 + type 2 + type 3 combined arrester based on spark gap technology, meets the minimum requirements of IEC 60364-5-53 clause 534 for the nominal discharge current capacity I_n and the lightning current discharge capacity I_{imp} in case of overhead line supply
- Easy, fast and completely toolless installation by snapping the arrester on 40 mm busbar systems
- Capable of protecting terminal equipment
- Includes overcurrent-protected power supply for additional applications in the compartment for additional applications and termination point meter mounting board according to VDE-AR-N 4100
- Small width of only 38 mm allows DEHNshield ZP to be combined with a supply adapter and thus installation between two selective main circuit breakers in a single meter panel
- A suitable cover clip according to DIN VDE 0603-1 for every standard meter panel and 2 x socket and 2 x plug (without connecting cables) for wiring the intelligent measuring system according to VDE-AR 4100 are included in delivery





Basic circuit diagram

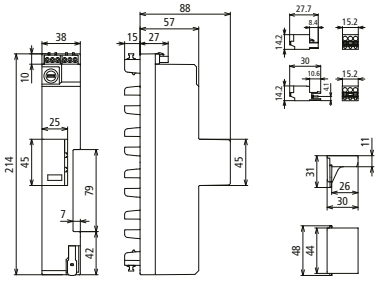

Dimension drawing

Combined arrester for TT and TN-S systems for use in the main power supply system (3+1 configuration) of residential buildings without external lightning protection (also with overhead line supply) including overcurrent-protected 230 V power supply for the compartment for additional applications / termination point meter mounting board according to VDE-AR-N 4100.

Type	**DSH ZP B2 SG TT 255**
Part No.	**909 396**
SPD according to EN 61643-11 / IEC 61643-11	type 1 + type 2 + type 3 / class I + class II + class III
Energy coordination with terminal equipment (≤ 10 m)	type 1 + type 2 + type 3
Nominal voltage (a.c.) (U_N)	230 / 400 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	255 V (50 / 60 Hz)
Lightning impulse current (10/350 µs) [L1+L2+L3+N-PE] (I_{total})	30 kA
Lightning impulse current (10/350 µs) [L-N] (I_{imp})	7.5 kA
Specific energy [L-N] (W/R)	14.06 kJ/Ohm
Lightning impulse current (10/350 µs) [N-PE] (I_{imp})	30 kA
Specific energy [N-PE] (W/R)	225 kJ/Ohm
Nominal discharge current (8/20 µs) [L-N]/[N-PE] (I_n)	20 / 80 kA
Voltage protection level [L-N] (U_p)	≤ 1.5 kV
Voltage protection level [N-PE] (U_p)	≤ 1.5 kV
Open-circuit voltage of the combination wave generator (U_{OC})	20 kV
Max. mains-side overcurrent protection	160 A gG
Temporary overvoltage (TOV) [L-N] (U_T) – Characteristic	440 V / 120 min. – withstand
Temporary overvoltage (TOV) [N-PE] (U_T) - Characteristic	1200 V / 200 ms – withstand
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (PEN,)	16-25 mm² stranded, fine-stranded
For mounting on	40 mm busbar systems
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 30 (in combination with cover)
Approvals	VDE
Power supply (for compartment for additional applications/termination point meter mounting board according to VDE-AR-N 4100) (U_N)	230 V
Rated current of the fuse link of the terminal device (class F) (I_n)	6.3 A
Fuse link	SIBA GZ 6.3 x 32 mm F 500

© DEHN (U.K.) LTD. • Unit 4 Velocity Point • Castleton Road • Armley • Leeds • LS12 2EE • United Kingdom • Tel. +44 113 541 8900 • info@dehn.co.uk • www.dehn.co.uk

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

Extended technical data	
Voltage protection level [L-PE] (U_p)	≤ 1.6 kV

Masterdata	
Net weight	548.27 g/pc(s)
GTIN	4013364409859
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN (U.K.) LTD. • Unit 4 Velocity Point • Castleton Road • Armley • Leeds • LS12 2EE • United Kingdom • Tel. +44 113 541 8900 • info@dehn.co.uk • www.dehn.co.uk

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component