

DPAN L (910 200)

- Remote visual indication for surge protective devices (SPDs)
- Current-saving LEDs with high luminosity
- Easy installation





Basic circuit diagram

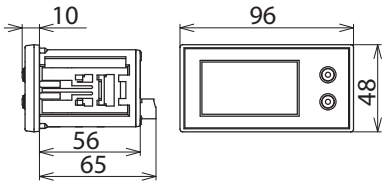

Dimension drawing

Type	DPAN L
Part No.	**910 200**
Power supply	2x 1.5 V lithium batteries, size AA
Operating state / fault indication	green LED (flashing) / red LED (flashing)
Flashing frequency	0.1 s on / 1.3 s off
Enclosure material	noryl
Degree of protection (front / rear side)	IP 40 / IP 20
Operating temperature range (T_U)	-25 °C ... +60 °C
Mounting dimensions	92 x 45 mm
Dimensions	96 x 48 x 75 mm

Masterdata	
Net weight	140 g/pc(s)
GTIN	4013364144019
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389091

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.