

SAK 6.5 SN MS (919 010)

- Lightning current carrying system for busbars
- Large-area shield contact
- Compensates the yield of cable materials



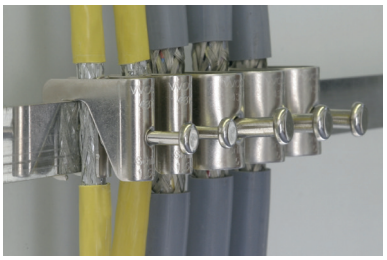

Basic circuit diagram

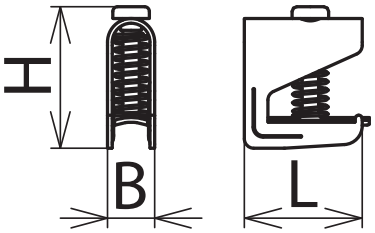

Dimension drawing

Shield terminals for earthing cable shields on busbars (18x3). Suitable for lightning equipotential bonding. Can be subsequently installed without interrupting the cable shield or requiring tools for installation.

Type	**SAK 6.5 SN MS**
Part No.	**919 010**
Lightning impulse current carrying capability (10/350 µs)	5 kA
Clamping range Rd	1.5-6.5 mm
Material	**nickel-plated brass**
Spring pressure	8-13 N
For mounting on	SN 18x3 CU 1000
Dimensions (B x L x H)	10 x 25 x 40 mm

Masterdata	
Net weight	13 g/pc(s)
GTIN	4013364071612
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.