

BXT M4 E (920 308)

- To be plugged into BLITZDUCTOR SP / XT base parts
- Easy to use
- Quick replacement when retrofitting a protection module





Basic circuit diagram

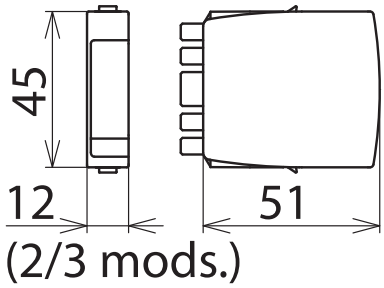

Dimension drawing

The plugged-in earthing module connects all lines connected to the BLITZDUCTOR SP / XT base part to the equipotential bonding. It directly earths unused cable cores, which are already connected to the base part.

Type	**BXT M4 E**
Part No.	**920 308**
D1 Total lightning impulse current (10/350 µs) (I_{imp})	10 kA
Operating temperature range (T_U)	-40 °C ... +80 °C
Degree of protection (with plugged-in protection module)	IP 20
Pluggable into	base part
Enclosure material	polyamide PA 6.6
Colour	grey

Masterdata	
Net weight	22 g/pc(s)
GTIN	4013364109209
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.